AVERO VIVA plus




beka different by design







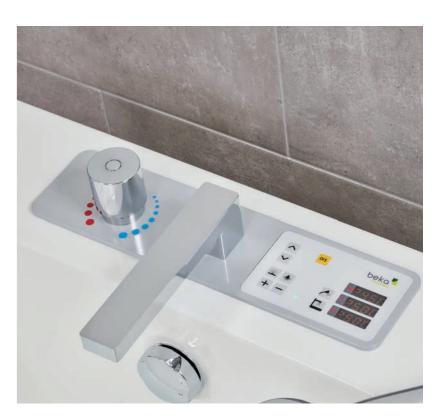

Numerous advantages for caregivers and residents.

The AVERO VIVA plus has a number of functions and options that enable a safe bathing experience. The modern control panel offers all the functions of the bath plus a highly visable digital temperature display for bathing water, water inlet and the hand shower. It is also equipped with a Lock-Out function and automatic water flushing of the tub inlet and hand shower.

The smart and timeless design of the AVERO VIVA plus enables a change of viewing direction. It is freely accessible with all modern bathing and transfer lifts and offers one of the largest lifting areas on the market!




Large lifting range of 400 mm with min. height = 683 mm and max. height = 1.083 mm




Maintenance override for thermal legionella flushing*

Deactivation of electrical anti-scald protection via lock cylinder

*depending on on-site hot water supply



Control panel with all functions and temperature displays for filling water, bathing water and hand shower



Optional: Integrated disinfection system



Lock-Out function via sensor switch (other locking variants optionally available)



Optional: Intuitive hand control with symbols for all functions

Control panel with 3 digital temperature displays

Temperature displays for: Water inlet • Bath water • Hand shower

Lock-Out function via sensor switch

The AVERO VIVA plus is equipped with an automatic Lock-Out function via sensor switch. Optionally, the Lock-Out function is available via Key combination on the control panel or via a locking cylinder.

Automatic water flush of spout and hand shower

The bathtub spout and hand shower are automatically flushed with water 48 hours after each use to help prevent Legionella build up. Upon request, the bathtub can be delivered without this setting.

Optional change of viewing direction

The smart design enables the care bathtub to be positioned without problem so that the bather can look freely into the room.

Large lifting range of 400 mm

The AVERO VIVA plus offers one of the largest lifting ranges on the market. With 400 mm adjustable height, caregivers are able to ergonomically position the working height of the care bathtub.

Optional Maintenance override for thermal Legionella flushing

The electronic anti-scalding protection can be deactivated using a lock cylinder. This way the maintenance staff can perform a manual legionella flush if necessary.

✓ Variety of Wellness options

The AVERO VIVA plus can be equipped with all BEKA Hospitec wellness options: Music-sound system, Colored-light system, Air-Relax system and Aroma system.

4

Promote the sensitive perception and relaxation of your residents!

With our exclusive wellness options.



Colored-light system (%)



The colored-light system creates a relaxing and optically stimulating atmosphere for the well being of your resident. It is equipped with a free choice of colors as well as with an automatic sequence program for color changing.

AirSpa system



The AirSpa system offers a pleasant and stimulating effect. The pleasing sensation on the skin provides for relaxation and tranquillization, especially for agitated patients while stimulating the perfusion of the skin. The jets are specially protected to prevent bacterial contamination eliminating the need for an internal disinfection device.



Aroma system



The integrated Aroma system allows the application of various scents, that together with the warm air from the Air-Relax system and the bathing water, offer a wonderful experience for the senses of your resident. The system is easy to operate and maintenance-free. This option is only available in combination with the Air-Relax system.





While bathing, the residents can enjoy a relaxing and stimulating sound experience with the optional music sound system. Connect your device via Bluetooth, and provide your individual music selection.



Technical Data

Dimensions	2.025 mm - 786 mm	80 x 31 in
Inner tub width, Upper body area	706 mm	28 in.
Lifting height	683 mm - 1.083 mm	27 x 42 in
SWL	400 kg	881 lbs
Power connection	230 V, 50 Hz	

Product Information

Electrical Height Adjustment with a large lifting range of 400 mm / 15.75 in.	
3 x Scalding protection	
Ergonomic inner tub body	
Armrests and grab bars for maximum comfort	
Automatic bathtub filling	
Automatic Lock-Out function via sensor switch	
Automatic water flushing of water inlet and hand shower (48 hours after use)	
Control panel with digital temperature display for filling water, bath water and hand shower	

Available Options



Aroma system



Colored-light system



AirSpa system



Bluetooth-music-sound system



RAL colors available



Disinfection system



Emergency function in case of power failure



Bathtub shortener



Change of viewing direction



Hand control



Automatic Lock-Out function via key combination



Automatic Lock-Out function via lock cylinder



Maintenance override for a thermal legionella flush

